

## Description and Application



**DW-A62L** is a rutile flux cored wire specially formulated to meet the rigorous demands for 500 MPa yield strength class low temperature service steels, as found in the offshore and shipbuilding industries.

Not only does this wire have excellent CTOD values at the standard -10°C test temperature, but is also have excellent CTOD values at the very severe test temperature of -40°C.

This wire is applied to the welding of medium to heavy section butt or fillet weld joints.



### Recommended Parameter Range, for flat position

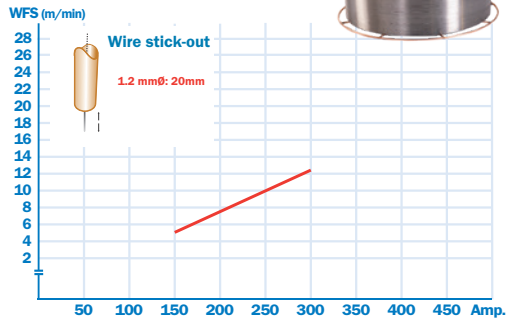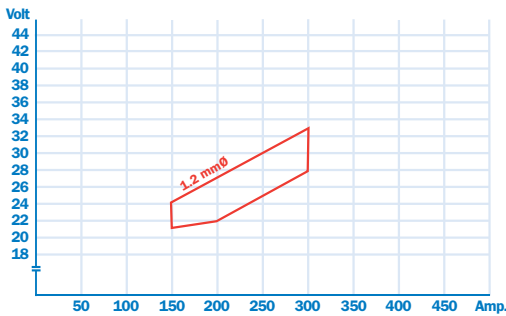

### Typical Chemical Analysis (wt. %)


C	Si	Mn	P	S	Ni	Cr	Mo
0.07	0.32	1.33	0.007	0.011	2.1	-	-

### Typical Mechanical Properties

	R <sub>e</sub> (MPa)	R <sub>m</sub> (MPa)	A <sub>5</sub> (%)	CV(J)-60°C
Guaranty	561	641	27	82
	min.500	560~720	min.18	min.47

Example of Diffusible hydrogen content: 3.9 [ml/100g]

### Welding Positions

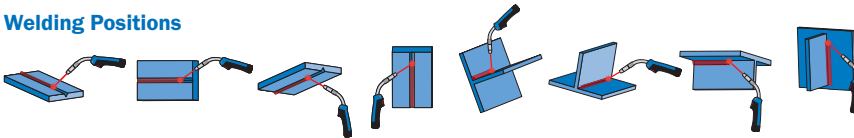

### Approvals

LR	DNV	BV	ABS	R.M.R.S	Others
5Y50S H5	VY50MS H5	-	5YQ500SA H5	-	CE